


➤ Single-acting Hydraulic Cylinder

- Max. working pressure: 700 Bar;
- Single acting cylinders with heavy duty return springs and are designed to be used in all orientations;
- Base mounting holes along with ram and collar threads enable various installation options;
- Durability is enhanced by using high strength alloy steel;
- Corrosive resistant baked enamel can be upgraded to nickel plating on most models;
- The stop ring avoids the piston rod over-reaching and enables maximum cylinder extension.

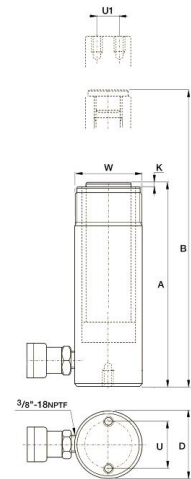

Model	Cap. (ton)	Stroke (mm)	Oil Cap. (cm ³)	Collaps. Height A (mm)	Extended Height B (mm)	Outside Dia. D (mm)	Bolt Circle U (mm)	Saddle Height K (mm)	Collar Thread W	Weight (KG)						
KSRC-50	5	16	10	41	57	58	28	-	-	1.0						
KSRC-51		25	16	110	135						1.0					
KSRC-53		76	50	165	241							1.5				
KSRC-55		127	83	215	342								1.9			
KSRC-57		177	115	273	450									2.4		
KSRC-59		232	151	323	555										2.8	
KSRC-101	10	26	38	89	115	57	39	6	2 1/4\"-14	1.8						
KSRC-102		54	78	121	175						2.3					
KSRC-104		105	152	171	276							3.3				
KSRC-106		156	226	247	403								4.4			
KSRC-108		203	294	298	501									5.4		
KSRC-1010		257	373	349	606										6.4	
KSRC-1012		304	441	400	704											6.8
KSRC-1014		356	516	450	806											
KSRC-151	15	25	51	124	149	69	47	9	2 3/4\"-16	3.3						
KSRC-152		51	104	149	200						4.1					
KSRC-154		101	205	200	401							5.0				
KSRC-156		152	308	271	423								6.8			
KSRC-158		203	411	322	525									8.2		
KSRC-1510		254	516	373	627										9.5	
KSRC-1512		305	619	423	728											10.9
KSRC-1514		356	723	474	830											
KSRC-251	25	26	86	139	165	85	58	10	3 5/16\"-12	5.9						
KSRC-252		50	166	165	215						6.4					
KSRC-254		102	339	215	317							8.2				
KSRC-256		158	525	273	431								10.0			
KSRC-258		210	697	323	533									12.2		
KSRC-2510		261	867	374	635										14.1	
KSRC-2512		311	1033	425	736											16.3
KSRC-2514		362	1202	476	838											
KSRC-308	30	209	880	387	596	101	-	10	3 5/16\"-12	18.1						
KSRC-502	50	51	362	176	227	127	95	2	5\"-12	15.0						
KSRC-504		101	719	227	328						19.1					
KSRC-506		159	1131	282	441							23.1				
KSRC-5013		337	2399	460	797								37.6			
KSRC-756	75	156	1601	285	441	146	-	5	5 3/4\"-12	29.5						
KSRC-7513		333	3417	492	825						59.0					
KSRC-1006	100	168	2239	357	525	177	139	2	6 7/8\"-12	59.0						
KSRC-10010		260	3466	449	709						72.6					