


➤ Square Drive Hydraulic Torque Wrench

- 700bar Max working pressure and the accuracy keep within $\pm 3\%$;
- All together 10 models with the range from 1121N.m to 72000N.m, which covers the most bolts size, and be the most comprehensive available in the market;
- The 360°*185 degree swivel is free to operation with no space limitation;
- The square drive operate with the high intense socket and suitable limitation;
- 360 degree adjustable reaction arm allows placing in any support point;
- Compact design with the raw material of advanced aluminum-titanium alloy, high intense.



The drive shaft can be either hexagon or square. The reaction arm can also be customized as per different working requirements.

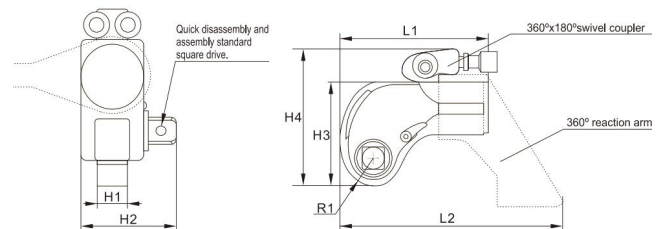

Model	Torque Range (Nm)	Square Drive (inch)	L1 (mm)	L2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	R1 (mm)	R2 (mm)	Weight (kg)
07MXTA	112-1120	3/4	110.8	139.3	42	65.8	76.2	108.1	20.5	68.3	1.8
1MXTA	187-1873	3/4	144.5	173.5	50	72	96	131	26	85	2.5
3MXTA	451-4512	1	178	229	68	95	127	176.5	34	114	5
5MXTA	752-7528	1-1/2	210.5	270.5	80	123	149	199	39	137	8
8MXTA	1078-10780	1-1/2	222	293	90	134	167	217	47	153	11
10MXTA	1551-15516	1-1/2	245.5	317.5	100	142	182	232	51	154	15
15MXTA	2019-20194	2-1/2	292.8	361.3	112	167.4	206	276.4	56	174.2	23
20MXTA	2666-26664	2-1/2	307.5	383.5	120	183	220	270	59	186	26.5
25MXTA	3472-34725	2-1/2	323	401	137	200	247	297	66	199	35
35MXTA	4866-48666	2-1/2	372.5	496.5	153	216	282	332	77	241	50
50MXTA	7200-72000	2-1/2	400	516	160	223	291	341	81	259	87